

07-10-00

A

JC648 U.S. PTO  
07/07/00Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:

FROMMER LAWRENCE &amp; HAUG LLP

745 FIFTH AVENUE

NEW YORK, NEW YORK 10151

TEL: (212) 588-0800

FAX: (212) 588-0500

Date: July 7, 2000Attorney Docket No.: 450117-02741JC648 U.S. PTO  
09/611895  
07/07/00ASSISTANT COMMISSIONER FOR PATENTS  
Box Patent Application  
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office  
of an application for patent in the name(s) of:

Paul SZUCS, Markus VELTMANN

entitled:

METHOD FOR RECORDING TRANSPORT STREAMS OF DATA

The following are enclosed:


- ☒ Specification ( 16 pages)  
☒ 9 Sheet(s) of Drawings  
☒ 16 Claim(s) (including 1 independent claim(s))  
☐ This application contains a multiple dependent claim
- ☒ Our check for \$ 690.00, calculated on the basis of the claims as  
amended by any enclosed preliminary amendment as follows:
- |  |           |
|--|-----------|
| Basic Fee, \$690.00 (\$345.00)   | \$ 690.00 |
| Number of Claims in excess of 20 at \$18.00 (\$9.00) each:             | -0-       |
| Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each: | -0-       |
| Multiple Dependent Claim Fee at \$260.00 (\$130.00)                    | -0-       |
| Total Filing Fee   | \$ 690.00 |
| <input type="checkbox"/> Assignment Recording Fee \$40.00              | -0-       |
- ☒ Oath or Declaration and Power of Attorney  
☒ New ☐ signed ☒ unsigned  
☐ Copy from a prior application (37 C.F.R. 1.63(d))
- ☐ Certified copy of each of the following application(s) to substantiate  
the claim(s) for priority made in the Declaration:

Application No.FiledInPlease charge any additional fees required for the filing of this  
application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants

By

  
William S. Frommer  
Reg. No. 25,506

09611895-070700

# FROMMER LAWRENCE & HAUG LLP

745 FIFTH AVENUE NEW YORK, NEW YORK 10151

1cc15 U.S. PRO  
09/611895  
07/07/00

WILLIAM S. FROMMER  
WILLIAM F. LAWRENCE  
EDGAR H. HAUG  
MATTHEW K. RYAN  
BARRY S. WHITE  
THOMAS J. KOWALSKI  
JOHN R. LANE  
DENNIS M. SMID \*  
DANIEL G. BROWN  
BARBARA Z. MORRISSEY  
STEVEN M. AMUNDSON  
MARILYN MATTHES BROGAN  
JAMES K. STRONSKI  
CHARLES J. RAUBICHECK

A. THOMAS S. SAFFORD  
JEROME ROSENSTOCK  
RAYMOND R. WITTEKIND, PH.D.  
SUSAN K. LEHNHARDT, PH.D.  
Of Counsel

GORDON KESSLER  
MARK W. RUSSELL \*  
BRUNO POLITO  
GRACE L. PAN \*  
JEFFREY A. HOVDEN  
JOE H. SHALLENBURGER  
CHRISTIAN M. SMOLIZZA  
GLENN F. SAVIT  
ROBERT E. COLLETTI  
DEXTER T. CHANG  
PETER J. WAIBEL  
LINDSEY A. MOHLE  
DEENA P. LEVY  
DARREN M. SIMON  
YUEFENG LIU, PH.D.  
CINDY HUANG  
JOHN G. TAYLOR

\*Admitted to a Bar  
other than New York

July 7, 2000

Assistant Commissioner for Patents  
Washington, D.C. 20231

Re: U.S. Patent Application  
Applicants: Paul SZUCS, Markus VELTMANN  
Our Ref.: 450117-02741

Dear Sir:

Enclosed are papers constituting the above patent application which is being filed under 37 C.F.R. 1.53 without a signed Declaration. Please accord a filing date and a serial number to such application and inform the undersigned thereof so that a signed Declaration and the surcharge required by 37 C.F.R. 1.16(e) may be duly filed.

Please address all correspondence to:

William S. Frommer, Esq.  
FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151

Respectfully,



William S. Frommer  
Reg. No. 25,506  
Attorney for Applicants  
Enclosures

[illegible]

jc815 U.S. PTO  
09/611895  
07/07/00

jc815 U.S. PTO  
09/611895  
07/07/00

jc815 U.S. PTO  
09/611895  
07/07/00

(Typed or printed name of person mailing paper or fee)

(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Paul SZUCS et al.  
Filed : Herewith  
For : METHOD FOR RECORDING TRANSPORT STREAMS OF DATA

745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EL560676565US  
Date of Deposit July 7, 2000  
I hereby certify that this paper or fee is being  
deposited with the United States Postal Service  
"Express Mail Post Office to Addressee" Service  
under 37 CFR 1.10 on the date indicated above and  
is addressed to the Assistant Commissioner for  
Patents, Washington, D.C. 20231.

Charles Jackson  
(Typed or printed name of person  
mailing paper or fee)

Charles Jackson  
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,  
please amend the above-identified application as follows:

IN THE CLAIMS:

Please amend the claims as follows:

Claim 3, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 4, line 1, delete "any of the claims 2 or 3" and  
insert --claim 2--;

004040-070700

Claim 5, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 6, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 8, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 9, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 10, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 12, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 13, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 14, line 1, delete "any of the preceding claims"  
and insert --claim 1--;

Claim 15, line 1, delete "any of the preceding claims"  
and insert --claim 1--.

REMARKS


The claims have been amended to eliminate multiple dependencies. The filing fee has been calculated based upon

PATENT  
450117-02741

these amendments to the claims.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP  
Attorneys for Applicants

By   
William S. Frommer  
Reg. No. 25,506  
Tel. (212) 588-0800

004020" 588-0800

PATENT  
450117-02741

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

TITLE: METHOD FOR RECORDING TRANSPORT STREAMS  
OF DATA

INVENTORS: Paul SZUCS, Markus VELTMANN

William S. Frommer  
Registration No. 25,506  
FROMMER LAWRENCE & HAUG LLP  
745 Fifth Avenue  
New York, New York 10151  
Tel. (212) 588-0800

004020" 558T960

## Description

- 1 The present invention relates to a method for recording transport streams of data according to the wording of claim 1.

It is a matter of fact that organizing and connecting electronic devices and in particular many types of consumer equipment within a network architecture becomes more and more important. This increasing importance is based on a need of universal data and control exchange between the variety of such equipment.

- 5  
10 In particular consumer equipment can be connected and organized with respect to a common network bus and/or interface which is used to receive and to exchange digital as well as analog data. By organizing different consumer equipment and devices with respect to the aforementioned bus structure or the like the concept of the so called home network (HN) is  
15 generated.

- Within such a home network different devices - e. g. video cassette recorders (VCR), digital audio and video broadcasting receiving devices and tuners (DAB, DVB), magnetic, magneto-optical and optical disc devices (CD-ROM, DVD) and  
20 the like - may serve and be embedded as data sources and services.

- A known problem in networks and storage media devices connected to such networks of the art is the fact that methods for storing data and storage media devices are in general constrained physically by their nature to have only one  
25 physical feed to the particular storage medium or storage medium device. This is in particular the case for tape-based devices, where the tape is capable of processing only a single or possibly a limited number of continuous data streams. The same applies for most disc media, and in particular for laser-based disc media, where only one physical storage feed can be supplied.

- 30 Therefore, when applying known methods and devices for recording and storing transport streams of data, the recording process is limited to receive data from only one data stream or channel and therefore from only a single and isolated source of data at anyone time. That means, when state of the art methods and devices for recording and storing transport streams of data are



- 1 applied to network architectures with a multiplicity of isochronous channels and therefore transport streams of data, only one service fed into the network can be recorded on a particular recording device.
- 5 Therefore, it is an object of the present invention to provide a method for recording and storing transport streams of data, which allows for more flexibility and which is capable of recording and storing simultaneous and independent transport streams of data.
- 10 That particular object is achieved by the inventive method according to the wording of claim 1. Preferred embodiments of the inventive method for recording and storing transport streams of data are within the scope of the dependent subclaims.
- 15 The inventive method for recording/storing independent and/or simultaneous transport streams of data is switchable to at least a first or recording mode. The recording mode comprises the step of receiving at least a first transport stream of data to be recorded/stored. Further, received transport streams are divided into series of packets with respect to a predefined clock and/or with
- 20 respect to the temporal relationships of said transport streams. To each of said transport streams or series of packets, respectively, a recording header is assigned. Furthermore, a series of partial transport streams is generated from at least said series of recording headers and said series of packets. A time series of said partial transport streams based on said clock is recorded/stored as
- 25 a complete or combined transport stream.

A basic idea of the inventive method is to classify transport streams of data to be simultaneously recorded with respect to their temporal relationship and/or with respect to a given clock cycle of the method. The temporal relationship

30 may be given by ordering the transport streams with respect to their first appearance in time.

Based on a clock or clock cycle of the method the transport streams and therefore the information content of the transport streams is divided or subdivided

35 into series of (information) packets. For each transport stream, which is continuously from its beginning to its ending, a time series of packets is generated, with each of said packets belonging to a distinct and well-defined clock cycle.

- 1 To each transport stream (TS) and therefore to each series of packets (P) a re-  
cording header H is generated. The recording header H may essentially de-  
scribe the temporal relationship of the distinct transport streams TS or chan-  
nels and therefore may allow to distinguish the transport streams TS and  
5 therefore the series of packets and the packets P from each other.

The incoming information, i. e. the complex of all transport streams TS of data,  
is recorded and stored as a sequence or a series of partial transport streams  
(ptlTS), each element of the sequence or series of partial transport streams and  
10 therefore each partial transport stream ptlTS itself contains the information of  
all simultaneous transport streams TS of data of a given clock cycle. The whole  
information content which is received continuously, is represented by record-  
ing/storing a complete or combined transport stream CTS, i. e. as a time series  
or time sequence of said partial transport streams ptlTS, which is based on  
15 said clock or clock cycle. The partial transport streams ptlTS for each clock  
cycle are generated from at least said series of recording headers H and said  
series of packets P for the respective clock cycle.

Additional information may be included into the partial transport stream  
20 ptlTS, which, of course, limits the bandwidth of the method.

A fundamental aspect of the inventive method is therefore to combine and/or  
multiplex several partial transport streams - each appearing on its own iso-  
chronous channel - into a single combined and/or complete transport stream  
25 CTS to allow the recording of multiple events simultaneously and to allow fur-  
ther the starting and/or ending the recording of an event while the recording  
of another event is running.

In accordance with a preferred embodiment of the inventive method the trans-  
30 port streams TS of data are received from a common digital bus system. That  
particular bus system may be based on an i.LINK<sup>®</sup>/IEEE 1394-based network  
bus and/or interface, which has some importance among possible architec-  
tures for home networks HN. Of course, further protocols/bus architectures  
are possible, e. g. IEC61883, AV/C, HAVi<sup>®</sup>, or the like.

35

A particular simple and easy to realize embodiment of the inventive method  
may be achieved by using a clock cycle of constant width/duration or constant

002029-5687960

1 frequency, respectively, in the process of dividing said transport streams. In  
connection with a common digital data bus system the bus cycle of the  
employed data bus may be used as the clock cycle for dividing such transport  
streams into packets.

5

For a particular simple and reliable organization of the incoming information it  
is suggested to generate each partial transport stream ptITS with a heading  
code section indicating at least the start of a new clock cycle/bus cycle, and  
therefore the beginning of a new recorded/stored partial transport stream

10 ptITS.

Of course, such a heading code section may be a heading cycle start indicating  
section CSI which may be present on the network or bus - if any - and may in-  
clude further information and not only represent the fact that a new cycle is  
15 beginning. For instance, the cycle start indicating section CSI may also con-  
tain complete time information with respect to the recorded/stored particular  
partial transport stream ptITS.

According to a further embodiment of the inventive method the transport  
20 streams TS are received by multiplexing and in particular by multiplexing from  
two or more isochronous channels of said common digital bus system.

Multiplexing in particular from isochronous channels, has the advantage that  
a predefined temporal structure is given and defined by the process of multi-  
25 plexing and/or by the temporal structure of the isochronous channels itself.

For a simple evaluation of the series of packets and therefore of the series of  
partial transport streams ptITS the recording header H may be generated and/  
or received with respect to the given temporal relationship according to the  
30 multiplexing process and/or according to the temporal relationships of the  
isochronous channels. The recording headers H may also be generated from or  
be identical with the so-called packet identifiers PID being present on the bus  
or network when using distinct data stream concepts, in particular MPEG-2 or  
the like. The PID on the data bus may be embedded into the packet as is real-  
35 ized for example by the MPEG-2 systems.

In a further embodiment of the inventive method each packet of each of said  
series of packets is paired and/or concatenated each at a time with said

- 1    respective recording header H within each partial transport stream ptlTS, in particular with the recording header H preceding the respective packet.

That means that for each distinct clock cycle and for each transport stream a  
5    given packet of information is taken and combined with the recording header H belonging to the particular transport stream and therefore to the series of packets of the particular transport stream. If the recording header H precedes the information content of the given clock cycle for the given transport stream TS, the particular information content can reliably be recognized and identified.  
10   

In general, the received transport streams TS or at least parts thereof have to be stored or buffered into buffer storage means in advance of and/or during the generation of the partial transport streams ptlTS. This allows a particular  
15    reliable organizing of the multiplexing process and therefore avoids the loss of data.

According to the above mentioned application to home networks, video and/or audio data are received at least in part within said transport streams TS.  
20   

To allow a rapid information exchange between the components of a home network and rapid recording and storing processes, said video and/or audio data are received in compressed or compactified form, in particular in the MPEG-2 format or the like.  
25   

In the application of a home network HN comprising customer equipment and customer advices it is preferred to have the received transport streams TS of data D stored as said series of partial transport streams ptlTS to a physical storage media device, such as magnetic tape devices, optical, magnetical,  
30    magneto-optical disc devices or the like.

One of the major advantages of the above described method is that by storing packeted information together with their recording header and/or packet identifier multiple recording processes can be started, continued, and/or terminated independently from each other, as long as the band width of the method  
35    - given by the clock cycle - and/or of the employed physical storage media device is sufficient.

1 Therefore, if - during the receipt of a given number of transport streams TS -  
recording of a further or additional transport stream TSa is requested, it is  
checked whether the band width of the method/storage media device allows  
the further requested transport stream TSa to be recorded. Furthermore, the  
5 request for recording the further transport stream TSa is rejected in the case  
of an insufficient band width. On the other hand, in the case of a sufficient  
band width the further transport stream TSa is incorporated into the series of  
former transport streams TS, in particular at a position in accordance to its  
temporal relationship to the former transport streams and/or to the  
10 isochronous channels of the bus system, and is - of course - described by a  
further recording header Ha or packet identifier of the additional transport  
stream TSa.

In the case of termination of the request of a distinct transport stream TSd  
15 and/or the termination of the distinct transport stream TSd itself - which has  
actually been in the list or series of transport streams to be recorded for a  
given time interval - the process of the recording of the residual transport  
streams TS is continued. The information content of the terminated transport  
stream TSd - which will then be empty - may be filled with blank information  
20 and the position of the residual transport streams will be unchanged.

According to a further embodiment of the inventive method for recording/  
storing transport streams TS of data, a waiting mode is provided which is  
entered in the case that the recording requests for all transport streams TS or  
25 all transport streams TS itself are terminated.

If all requests for recording data streams are terminated or withdrawn, the  
inventive method switches to the waiting mode, in which no recording - or  
30 playback - process is executed.

In a further embodiment of the inventive method also a playback mode is  
provided for playing back transport streams TS previously being recorded/  
stored. Furthermore, said playback mode can be entered only from said  
waiting mode to avoid conflicts with the requested recording processes.

35 Some of the basic principles and main advantages of the inventive method for  
recording and storing transport streams of data over the state of the art  
methods will be summarized in the following.

1 As current analog video cassette recorders (VCR) can record only one program,  
i. e. one distinct transport stream TS of data, at a time onto the running tape -  
a fact which also applies for the digital video (DV) SD-format of digital video  
cassette recorders - and as new types of digital stored media devices have  
5 already been developed, in particular to record MPEG-2 transport streams, it  
has become necessary to develop the inventive method for recording and  
storing transport streams TS of data which are present on digital data busses  
employed in known networks and in particular in known home networks.

10 The proposed inventive method is capable of recording multiple events - i. e.  
multiple transport streams TS of data - simultaneously. Furthermore, the in-  
ventive method as described above is capable of starting and/or ending a  
process of recording events/transport streams of data, while the recording and  
storing of other events/transport streams of data remain unaffected.

15 The problem solved with the inventive method arises, as some kinds of storage  
media devices are constrained physically by their nature to have only one  
physical feed to the storage medium. This applies, for example, for tape based  
devices, where the tape contains only one or maybe several but a limited  
20 number of traces for continuous stream data. This also applies for most disc  
media as optical laser-based discs or magnetical or magneto-optical discs, as  
only one physical storage feed is accessible in these cases.

With the inventive method it is for the first time possible to receive data not  
25 only from one isochronous channel. Therefore - in particular in a network  
environment such as an i.LINK®/IEEE1394-based network bus/interface, the  
receipt of data streams not only from a single source but from a variety of data  
sources connected to the network is possible independently and simul-  
taneously. Additionally, in contrast to the current state of the art, the trans-  
30 port streams of data to be recorded are organized, checked, and processed in a  
particular reliable manner.

The invention - in particular for transport stream storage devices on the basis  
of the MPEG-2 format - is capable of recording several events simultaneously,  
35 from one or more sources on the network and further capable of commencing  
and finishing the recording of the events and transport streams while the  
recording of the other events and/or transport streams is active and  
unaffected.

1 Therefore, in a digital home network environment, the storage device can  
principally interact with or be controlled by one or more digital video broad-  
casting (DVB) devices or with any other equipment, being able to source digital  
video data, in particular MPEG-2 partial or full transport streams TS, to inter-  
5 actively select one or several services or transport streams to record simul-  
taneously and concurrently. According to the inventive method all required  
partial or full transport streams to be recorded into a single complete or com-  
bined transport stream are multiplexed and stored on the physical storage me-  
dium device.

10

During a recording, for example when the storage device is already recording  
an event from a DVB receiver, the user or another user employing another  
device, can add additional services or transport streams to be recorded, as  
long as the VCR has free bandwidth to accommodate the additional data  
15 streams on the storage medium. Additional services or transport streams can  
originate from the same transport stream currently being received or from a  
separate device elsewhere in the home network.

In the recording mode of the inventive method all services or transport streams  
20 TS to be recorded/stored may arrive at the storage device via the same inter-  
face - for example the i.LINK®/IEEE1394-bus/interface - each on its own iso-  
chronous channel. Current 1394 link ICs can monitor only a single channel  
out of up to 63 possible isochronous channels at a time. Therefore, in a certain  
realization of the invention a 1394-link-solution is required, which can moni-  
25 tor several isochronous channels simultaneously or which has multiple single-  
channel 1394-interfaces.

The data from the distinct services/transport streams may arrive within the  
employed home network in every IEEE1394 bus cycle but need not. There may  
30 be of course cycles in which no data are contained for one or more con-  
nections, i. e. for one or for more positions in the series of packets. For this  
reason, the incoming data for each connection/transport stream may be  
buffered in order to be able to multiplex the data into a continuous combined  
transport stream CTS.

35

In a realization for such a buffer storage means, each isochronous channel  
receiver may place data in a respective and assigned transport packet FIFO

- 1 buffer (first-in/first-out). A respective transport stream recording processor multiplexes data from each buffer to generate a single combined transport stream CTS to be streamed to the storage medium device. The stored combined transport stream CTS must be compliant, so that reliable coding is guaranteed
- 5 in the playback mode, in particular not only in the device which made the recording, but also in any other equivalent storage device, for example from another manufacturer.

Of course, during the recording mode additional information has to be

10 included into the partial transport stream ptlTS, for example a program association table PAT, a program map table PMT, selection information table SIT and others, the latter of which describing the particular information units being selected from all information sources existing in a network for the recording/playback process.

- 15 Valid PAT, PMT and SIT tables are essentially provided by a program specific information/service information PSI/SI generator block. If services are accepted from different source devices it might be possible that some re-multiplexing is necessary, as the services from different broadcast or storage systems could possibly use common or already occupied recording headers H or
- 20 PID values. If a particular header or PID processor functionality is not provided by the system, the storage device for recording/storing and playback will decline to record a new service possibly with an already occupied header or PID value, which is then in conflict with current recording processes and
- 25 therefore with current information contents already been recorded. Therefore, according to the inventive method a storage device and in particular an MPEG TS storage device has to automatically update PSI and SI tables to maintain a compliant combined transport stream CTS in the case when recordings are added or stopped.

- 30 To initiate a recording session, the user selects the event to be recorded by navigating the possible devices or data sources in the home network HN. When the user starts the recording process, the mode control of the method and the storage device places the storage device into the record mode. In that particular state any playback request entered by the user or by another user is
- 35 rejected. However, if a user wishes to record a further event in parallel to be recorded, it is checked on whether or not there is sufficient band width capacity available on recording medium. In the case of a sufficient band width



capacity a re-multiplexer checks on whether or not a re-allocation of PIDs is necessary with the introduction and incorporation of the further event to be recorded. When such a re-allocation is necessary the re-multiplexer build new PAT, PMT, SIT tables and inserts them into the multi-event ptiTS while continuing the recording session with the updated tables.

As described above, the provided playback mode may be entered by a user only in the case when all recordings have been terminated and the inventive method or the particular storage device is in the waiting mode. Only in that case the playback of a recorded set of transport streams can be started. An event will be able to be played back from a tape, a disk or any other storage device medium containing multiple events in parallel.

15 Although there is - in particular for tape media - no standard method available to catalogue a storage mediums complete contents on the storage medium itself, it is possible to use known methods of memory labels or memories in cassette (in DV format) to register the recordings and storings in a proprietary way, so as to make fast indexing easier, in particular without having to spool tape media to scan for the events.

Using the memory in cassette (MIC) index, a quick spool to the start of an event can be achieved. A playback mode is then started. Adding or the disappearance of an event recorded in parallel will not effect the event currently being played back.

When the event being played back is the only event recorded on the storage medium, i. e. when no other events were recorded in parallel, then no playback TS processing is required, as the ptiTS on the storage medium is already valid for the event being played back. If the required event is accompanied by others, or in the case when others appear during a playback, then TS processing is activated and carried out by a TS playback processor. TS processing in this case means the filtering of PID streams belonging to components of other events, the substitution of the PAT, PMT and SIT tables to be valid for the single program ptiTS output to the home network HN, and possibly the re-processing of PIDs which had been changed during the recording, to enable a seamless decode on the display device. For a local display session of an event, a demultiplexer and an A/V decoder are required.

1 The present invention will be understood in more detail together with its numerous modifications and advantages from the following detailed description of preferred embodiments and by means of the accompanying drawings, wherein

5

**Fig. 1** is a schematical drawing of a home network to which the inventive method may be applied,

**Fig. 2** is a block diagram of a storage medium device involving the inventive method,

10 **Fig. 3** is a block diagram showing a preferred embodiment of the inventive method,

**Figs. 4A, B** elucidate the relationship between data on the bus/network and data on a storage medium stored according to a preferred embodiment of the inventive method,

15 **Fig. 5** is a block diagram showing details of an embodiment of an home network interface involving the inventive method,

**Fig. 6** is a block diagram showing schematically a recording section involving the inventive method,

**Fig. 7** is a block diagram showing a playback section involving the inventive method, and

20

**Fig. 8** shows a complete or combined transport stream CTS on a storage medium according to a preferred embodiment of the inventive method.

25 A typical home network to which the inventive method may be applied is shown schematically in Fig. 1.

Connected to a data bus system/interface 1 - in particular on the basis of a IEEE1394-based bus/interface - are different devices serving as data sources for video and audio data. These devices are for example digital video broadcasting (DVB) receiver or HN-tuner 4, video cassette recorder (VCR) 3, home archives 2, particularly based on personal computers, interactive and service on demand terminals (SDT) 6, and DVD devices 7 or the like. Furthermore, controller and/or display devices 5 may be connected to the bus system 1.

35 Transport streams TS containing information to be stored/recorded as well as control information may be supplied by these devices via the network bus 1 to a storage device 8 which can be controlled and monitored by a local monitor and user interface 9.

004040" 5687560

1 Fig. 2 shows by means of a schematical block diagram the overall organization  
of a storage medium device 8 connected to a common digital data bus 1 on the  
basis of a IEEE1394 bus/interface system and employing the inventive method  
for recording/storing transport streams of data.

5

The storage medium device 8 comprises the storage medium 8a per se as well  
as a TS recording processor 11 and a TS playback processor 12 which control  
and carry out the record mode and the playback mode of the inventive method  
employed by the storage medium device 8. The storage medium device 8 is  
10 connected to the common digital bus 1 via the home network (HN) interface 10.  
According to this connection transport streams TS of data may enter the  
storage medium device 8 or vice versa may be supplied to the digital bus 1.

On the other hand distinct data streams may be supplied via a A/V decoder 13  
15 to a locally connected display device 14.

The organization of a preferred embodiment of the inventive method for  
recording/storing transport streams of data is shown by the flow chart of Fig.  
3.

20

The preferred embodiment of Fig. 3 employs a waiting mode 15, a record mode  
17 and a playback mode 16 for recording and playing back transport streams  
of data, respectively.

25 The ground state of the method is the waiting mode 15 in which the method  
checks for incoming requests for recording or playing back events from/to the  
home network HN.

Upon a request for recording an event from the home network to the storage  
30 media device 8 in step R1 it is checked in step R2 on whether or not the  
method is already in the playback mode and if so recording request is rejected.  
If the method is not in the playback mode or is already in the recording mode  
it starts to receive data from the isochronous channels in step R3. If neces-  
sary, PID processing is initiated in step R4. If the program selection/service  
35 information table has to be updated a new PSI/SI table is generated and  
incorporated into the partial transport stream ptITS in step R5. Then recording  
is started in step R6.

00611895-070700

- 1 If on the other hand it is requested to play back an event recorded previously in step P1, it is checked if the method is still in the recording mode in step P2 and if so the playback request is rejected. If the method is not in the record mode the method searches for the required data or event recorded on the stor-
- 5 age medium 8 in step P3. Then the data or the event is played back to the HN in step P4.

Figs. 4A and 4B demonstrate the relationship between data present on the bus/network and data on a storage medium stored according to its preferred  
10 embodiments of the inventive method.

Fig. 4A shows the time structure of data present on a data bus/network for example of a data bus with an IEEE1394-structure having a bus cycle duration of 125  $\mu$ s. On the data bus/network the beginning of each bus cycle is indicated by the so-called cycle start or cycle start indicator CSI. Depending on  
15 the band width of the data bus/network a distinct amount of data may be transported in a time multiplexed structure, i. e. the band width of the bus network is subdivided into sections for isochronous data channels as well as asynchronous data channels.

20 In the examples of Fig. 4A among other isochronous channels and asynchronous data data D1 and D2 for isochronous channel connections 1 and 2 are present for the bus cycle shown in Fig. 4A.

- 25 According to the temporal relationship of datablocks D1 and D2 - defined by the time arrow of Fig. 4A - and/or the possibly embedded packet identifiers PID1 and PID2 the inventive method composes on the storage medium a complete or combined transport stream CTS in accordance with afore-mentioned temporal relationship of data packets D1 and D2 to be stored and in accordance with the given transport direction, as shown in Fig. 4B.
- 30

The beginning of each bus cycle may be represented on the storage medium within said complete or combined transport stream as a cycle start mark C. Data blocks D1 and D2 present on the data bus/network are embedded by the  
35 inventive method within partial transport streams ptlTS1 and ptlTS2, respectively. Within said partial transport streams ptlTS1 and ptlTS2 the data D1 and D2d per se are stored within packets P1 and P2 each of which being preceded by a so-called recording header H1 and H2. Each of said recording head-

1   ers H1 and H2 allows the inventive method to identify and to adapt the record-  
ing/playback mode with the respective isochronous channels. Therefore, said  
recording headers H1, H2 serve as a identification or adaption preamble for  
the data of each isochronous channel and for each connection.

5

Fig. 8 shows the structure of a complete or combined transport stream CTS on  
a storage medium built up by employing the inventive method according to a  
preferred embodiment for the case that the number of events to be recorded  
changes with time.

10

The complete or combined transport stream CTS is organized by the temporal  
structure of the bus cycle of the data bus on which the home network is based.  
The bus cycle defines the bandwidth of the storage medium device 8 and also  
the length and the duration of the partial transport streams ptlTS. The com-  
15   bined transport stream CTS is built up by a sequence of successive partial  
transport streams ptlTSj, ptlTSj+1, ptlTSj+2 ..., each of which comprising in  
this example a heading CSI-section indicating the start of a new bus cycle. The  
information content of each partial transport stream ptlTS is organized as a  
sequence or series of packets P having in this example fixed and identical du-  
20   rations together with recording headers H having in this example fixed and  
identical locations.

Partial transport stream ptlTSj contains information from three different  
events and therefore recording headers H1, H2, H3 each of which is followed  
25   by packets P1, P2 and P3, respectively.

In partial transport stream ptlTSj+1 the recording of the second event H2, P2  
has been terminated and the recording of a fourth event H4, P4 has been  
started. Therefore, the location of former second event is free or empty in this  
30   example and a fourth location is occupied by recording headers H4 followed by  
the information content of the fourth event/packet P4. The same applies for  
the next partial transport stream ptlTSj+2.

According to another realization of the inventive method, e. g. in MPEG-2 sys-  
35   tems or the like, packets of information may be used to build said partial  
transport streams, which do not have a fixed duration and/or a strictly located  
PID but a PID which is embedded into the distinct packets.

00611895.070700

Fig. 5 shows in more detail the HN interface utilized as the connecting part between the storage medium device 8 and the common data bus 1.

First of all the HN interface 10 comprises a physical layer 18 for connecting to  
5 the data bus 1, in the case of Fig. 5 it is a IEEE1394 physical layer.

For each connection 1 to n to the digital bus 1 there is provided an isochronous channel receiver 19 and a transport packet buffer 20 to store the received information from the TS in an intermediate stage to allow for correct  
10 multiplexing. From the HN interface 10 the transport streams are supplied to the TS recording processor 11 and then to the storage medium 8a.

Fig. 6 shows by means of a block diagram more details of the TS recording processor 11 being connected to the HN interface 10.

For each connection to the digital data bus 1 the TS recording processor 11 comprises a PID processor 26, from which the transport streams are fed into a TS multiplexer 21 which forms a sequence of partial transport streams ptlTS and therefore the complete or combined transport stream CTS as a time series  
20 of the partial transport streams ptlTS. CTS is supplied to the storage medium 8a. If necessary, a PSI/SI generator 22 supplies additional information to the partial transport streams in the record mode of the inventive method.

Fig. 7 shows the organization of the home network utilizing the inventive method in the playback mode. Due to the MIC index or the like of the storage medium 8a the location of the requested information to be played back is found. Then the partial transport streams ptlTS are played back to the so-called TS playback processor 12. Due to the interaction of a TS analyzer 24, a TS re-multiplexer 23 and the PSI/SI generator 25 the requested information is selected from the partial transport stream ptlTS. Then the processed partial transport stream selected for output is fed into the physical layer 18 of the data bus connection of the HN interface.

### Claims

- 1    **1.**    Method for recording/storing independent and/or simultaneous transport streams of data,  
being switchable to at least a first or recording mode,  
said recording mode comprising at least the steps of:
- 5        **a)**    receiving at least a first transport stream (TS1, TS2, ..., TSn) of data (D1, D2, ..., Dn) to be recorded/stored,  
**b)**    dividing each of said transport streams (TS1, TS2, ..., TSn) into series of packets (P1, P2, ..., Pn) with respect to a predefined clock and/or to the temporal relationships of said transport streams (TS1, TS2, ..., TSn),  
10       **c)**    assigning to each of said transport streams (TS1, TS2, ..., TSn)/series of packets (P1, P2, ..., Pn) a recording header (H1, H2, ..., Hn),  
**d)**    generating a series of partial transport streams (ptlTS1, ptlTS2, ...) from at least said series of recording headers (H1, H2, ..., Hn) and said series of packets (P1, P2, ..., Pn) and  
15       **e)**    recording/storing a combined transport stream (CTS) as a time series of said partial transport streams (ptlTS1, ptlTS2, ...) based on said clock.
- 20       **2.**    Method according to claim 1, **characterized in** that  
said transport streams (TS1, TS2, ..., TSn) of data (D1, D2, ..., Dn) are received from a common digital bus system, in particular of an i.LINK/IEEE 1394-based network bus and/or interface.
- 25       **3.**    Method according to any of the preceding claims, **characterized in** that  
a clock cycle of constant frequency is used for dividing said transport streams (TS1, TS2, ..., TSn).
- 30       **4.**    Method according to any of the claims 2 or 3, **characterized in** that  
a bus cycle is used as a clock cycle.
- 5.**    Method according to any of the preceding claims, **characterized in** that  
each of said partial transport streams (ptlTS1, ptlTS2, ...) is generated with a heading cycle start indicating section (CSI) for indicating the beginning of a new clock cycle and therefore the beginning of a new recorded/stored partial transport stream (ptlTS1, ptlTS2, ...).

1    **6.**     Method according to any of the preceding claims, **characterized in** that  
          said transport streams (TS1, TS2, ..., TSn) are received by multiplexing  
          said transport streams (TS1, TS2, ..., TSn), in particular from isochronous  
          channels of said common digital bus system.

5

**7.**     Method according to claim 6, **characterized in** that  
          said recording headers (H1, H2, ..., Hn) and/or said temporal relation-  
          ships of said transport streams (TS1, TS2, ..., TSn) are received and/or gener-  
          ated at least from the temporal relationships of said multiplexing step and/or  
10    of said isochronous channels.

**8.**     Method according to any of the preceding claims, **characterized in** that  
          each packet of each of said series of packets (P1, P2, ..., Pn) is paired  
          and/or concatenated each at a time with said respective recording header (H1,  
15    H2, ..., Hn) within each partial transport stream (ptlTS1, ptlTS2, ...), in par-  
          ticular with the recording headers (H1, H2, ...) preceding the respective packet.

**9.**     Method according to any of the preceding claims, **characterized in** that  
          the received transport streams (TS1, TS2, ..., TSn) or at least parts  
20    thereof are stored in buffer storage means in advance of and/or during gener-  
          ating said partial transport streams (ptlTS1, ptlTS2, ...).

**10.**    Method according to any of the preceding claims, **characterized in** that  
          video and/or audio data are received at least in part within said trans-  
25    port streams (TS1, TS2, ..., TSn).

**11.**    Method according to claim 10, **characterized in** that  
          said video and/or audio data are received in compressed or compactified  
          format, in particular in the MPEG-2 format or the like.

30

**12.**    Method according to any of the preceding claims, **characterized in** that  
          the received transport streams (TS1, TS2, ..., TSn) of said data (D1,  
          D2, ..., Dn) are stored as said series of partial transport streams (ptlTS1,  
          ptlTS2, ...) to a physical storage media device, such as a magnetic tape device,  
35    optical, magnetic, magneto-optical disc devices or the like.



whereas in the case of a sufficient band width the further transport stream (TSa) is incorporated into the series of the former transport streams (TS1, TS2, ..., TSn) at a position according to its temporal relationship with respect to the former transport streams and/or the respective isochronous channel of the bus system.

15. Method according to any of the preceding claims, **characterized in that** a waiting mode is provided which is entered in the case that the recording requests of all transport streams (TS1, TS2, ..., TSn) and/or the transport streams (TS1, TS2, ..., TSn) itself are terminated.

16. Method according to claim 15, **characterized in that**  
a playback mode is provided for playing back transport streams (TS1, TS2, ..., TSn) previously recorded, and,  
said playback mode can be entered only from said waiting mode.

35

## **Abstract**

### **"Method For Recording Transport Streams of Data"**

A method for recording and storing independent and/or simultaneous transport streams of data is suggested. The inventive method comprises at least a recording mode in which at least a first transport stream of data to be recorded/stored is received. The transport streams are divided into series of packets with respect to a predefined clock or with respect to their temporal relationships. To each transport stream and to the series of packets respectively a packet identifier is assigned. A series of partial transport streams is generated from at least said series of packet identifiers and said series of packets. A time series of said partial transport streams based on said clock is recorded and stored as a combined transport stream.

(Fig. 3)

00611895-070700

004040" 553T 960

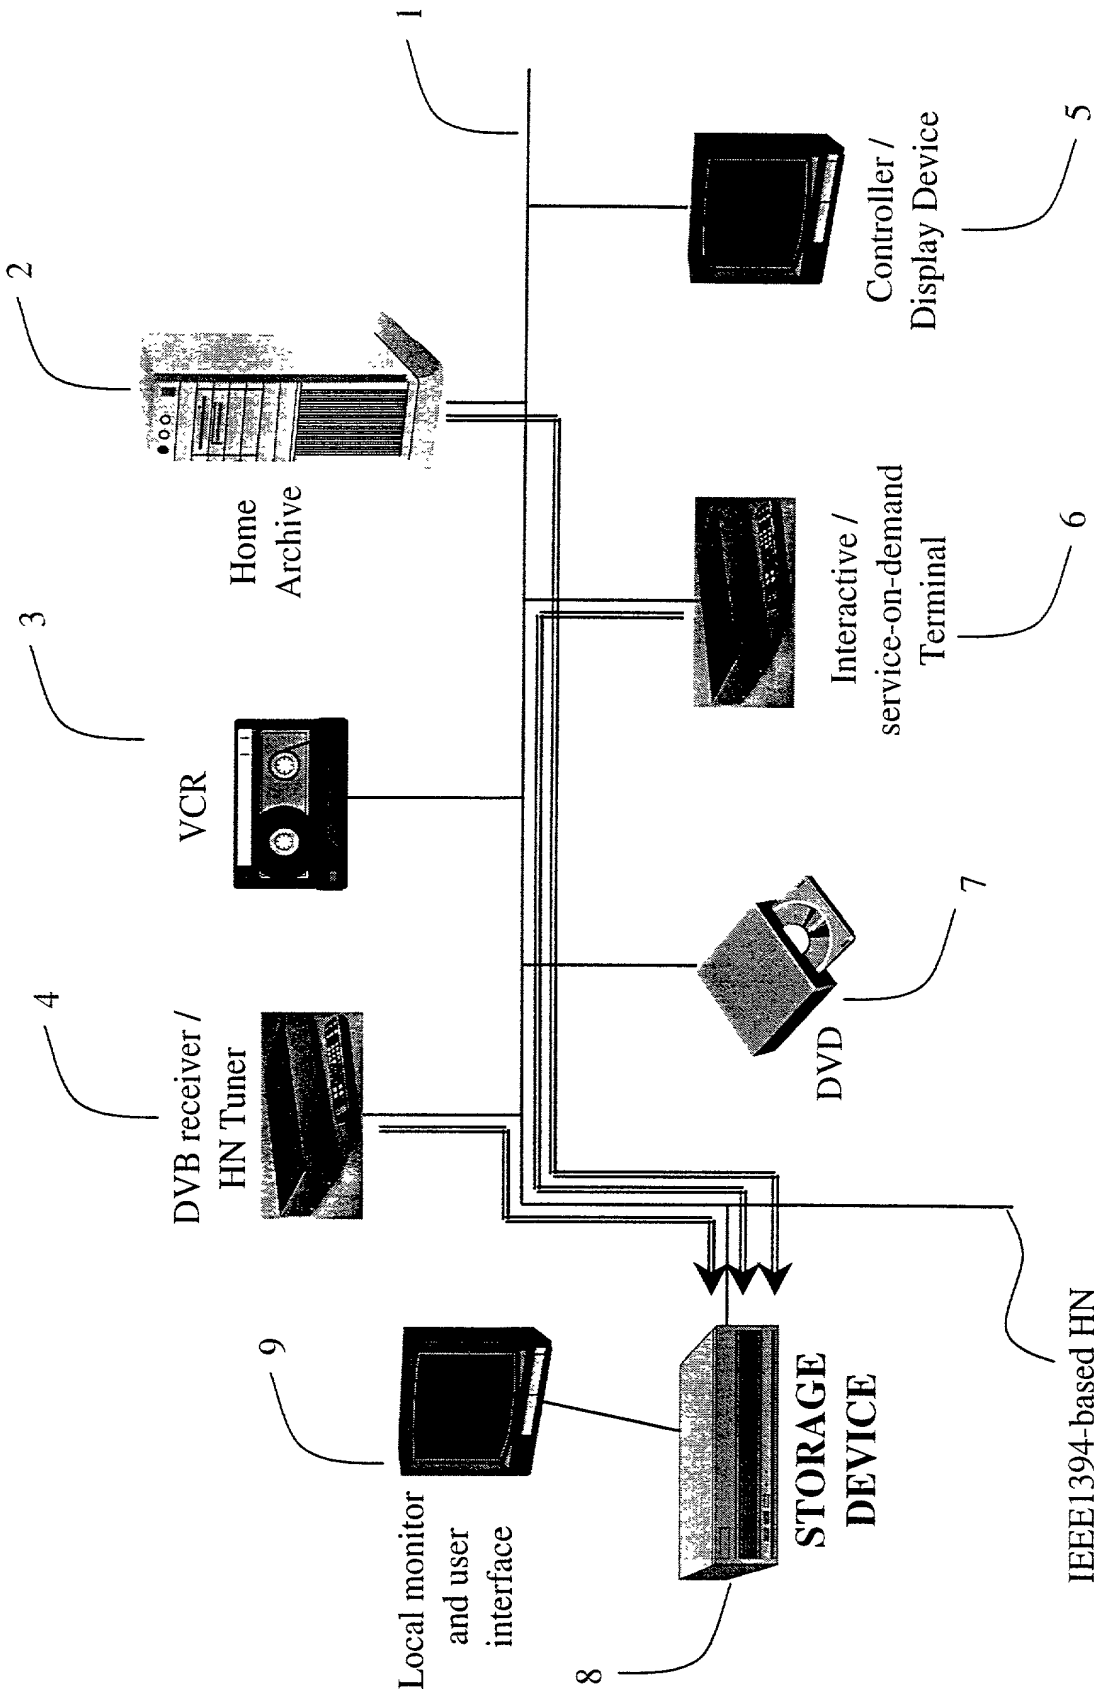


Fig. 1

002020" SEET 1360

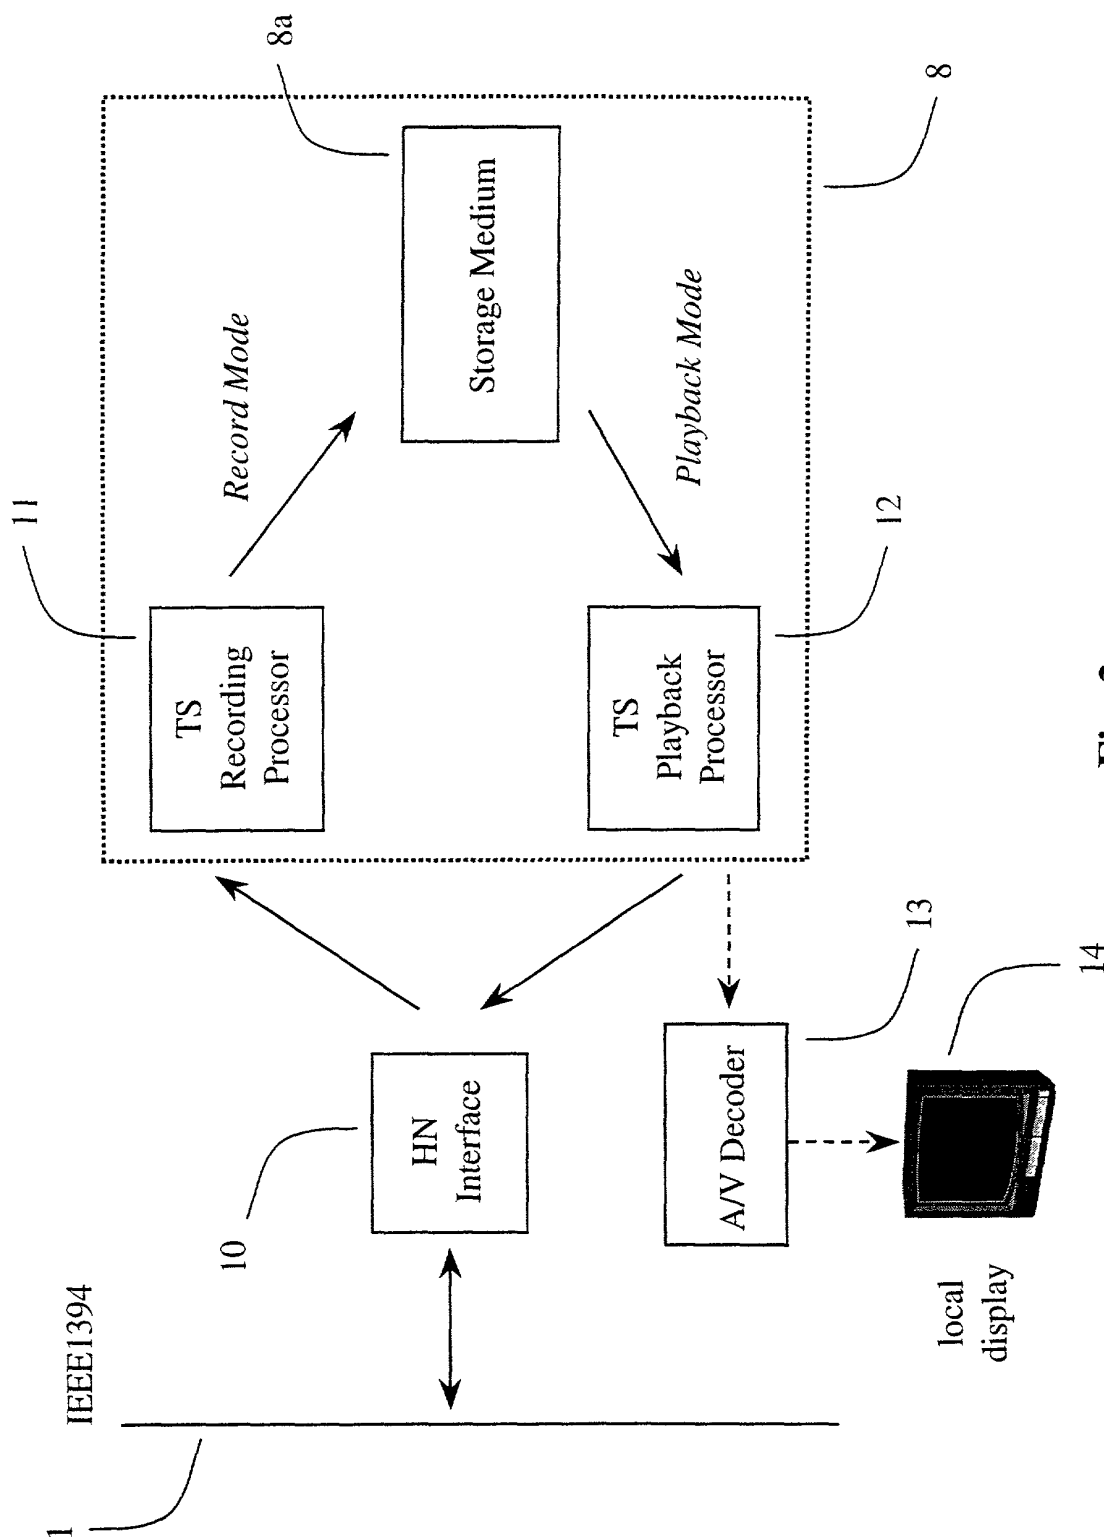


Fig. 2

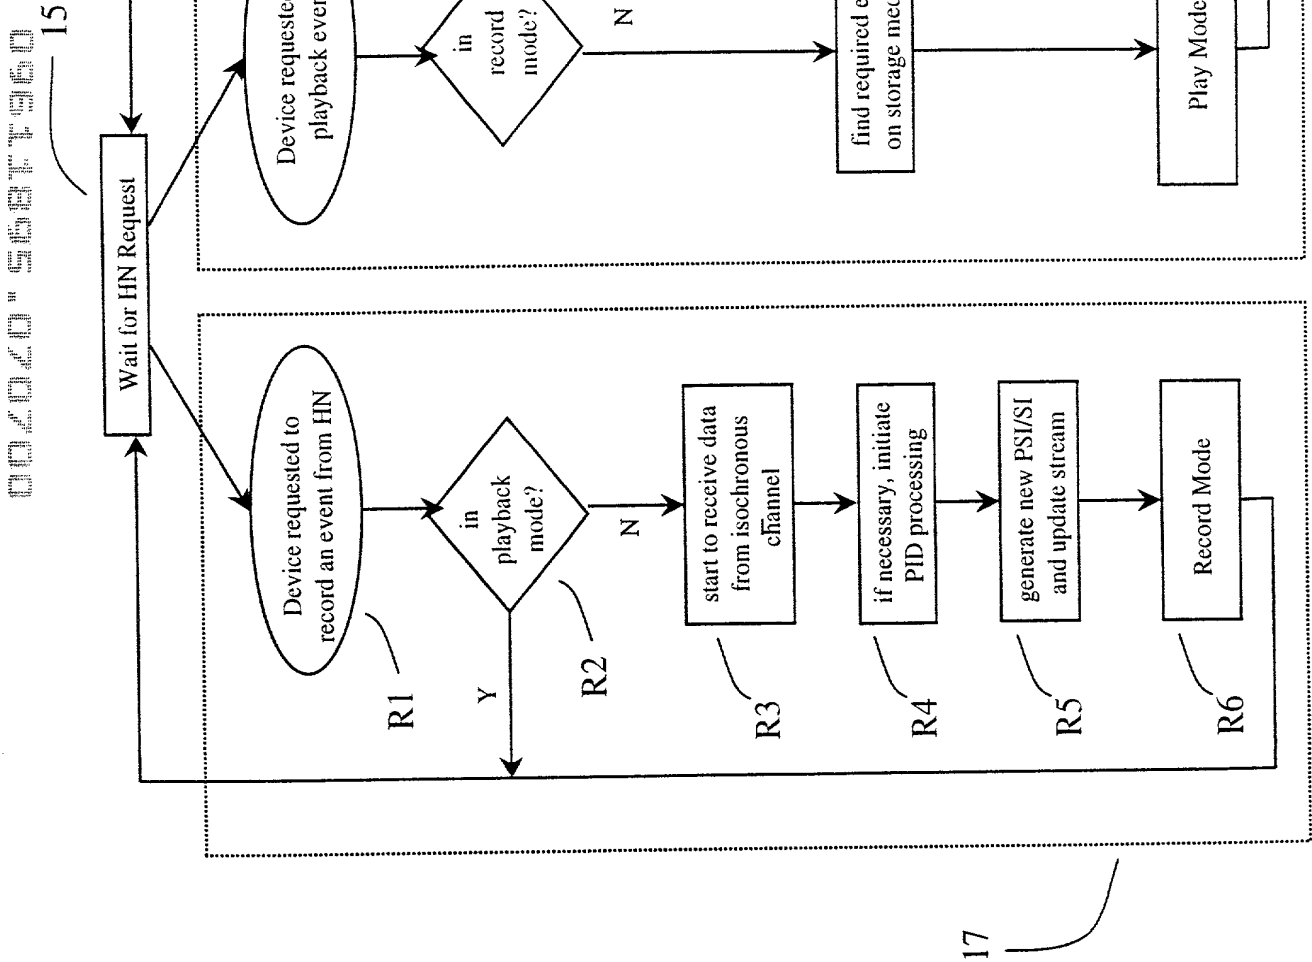


Fig. 3

004040" S6BT960

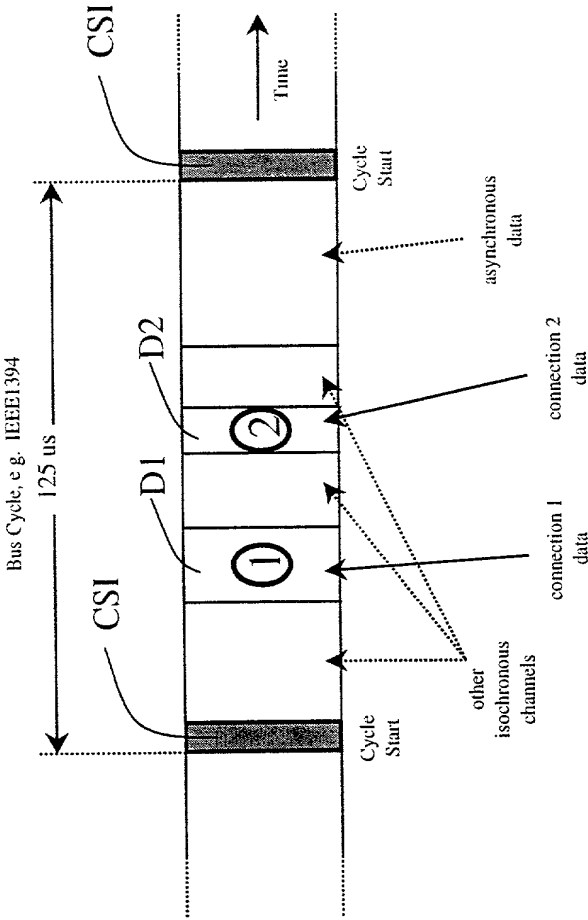


Fig. 4A

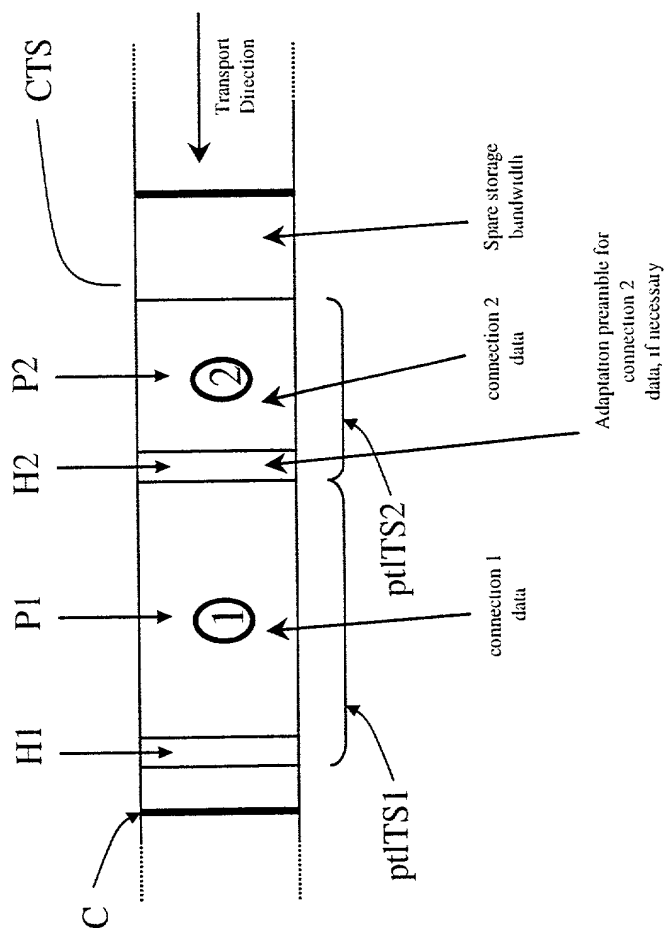


Fig. 4B

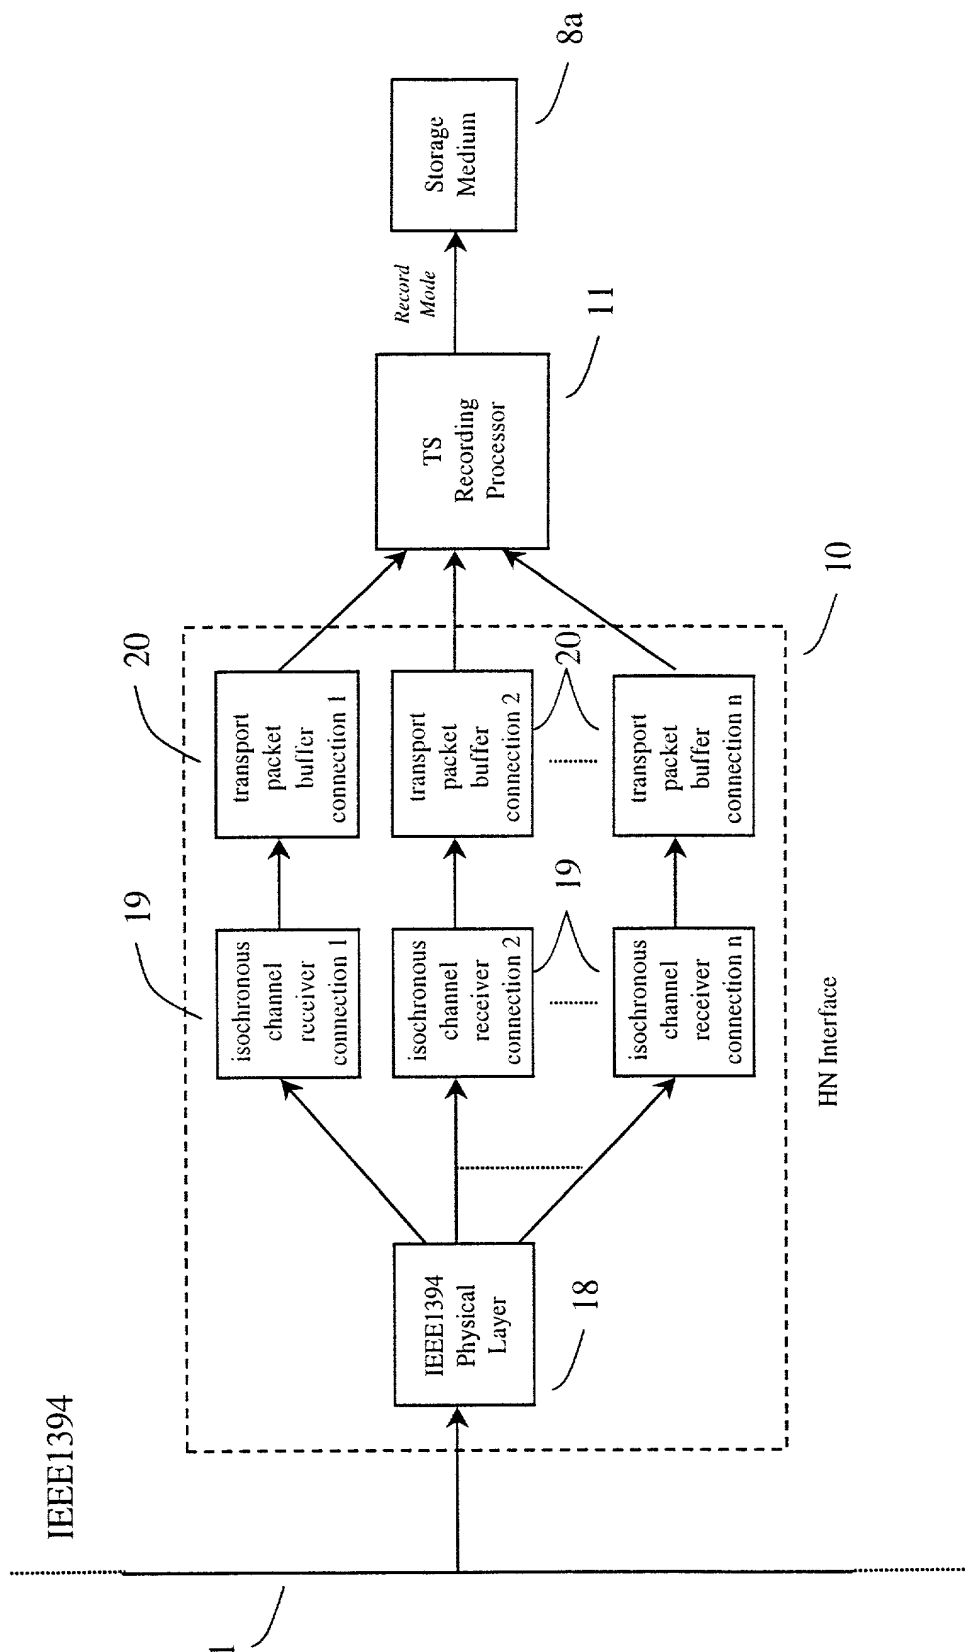


Fig. 5



000020" SEBTF360

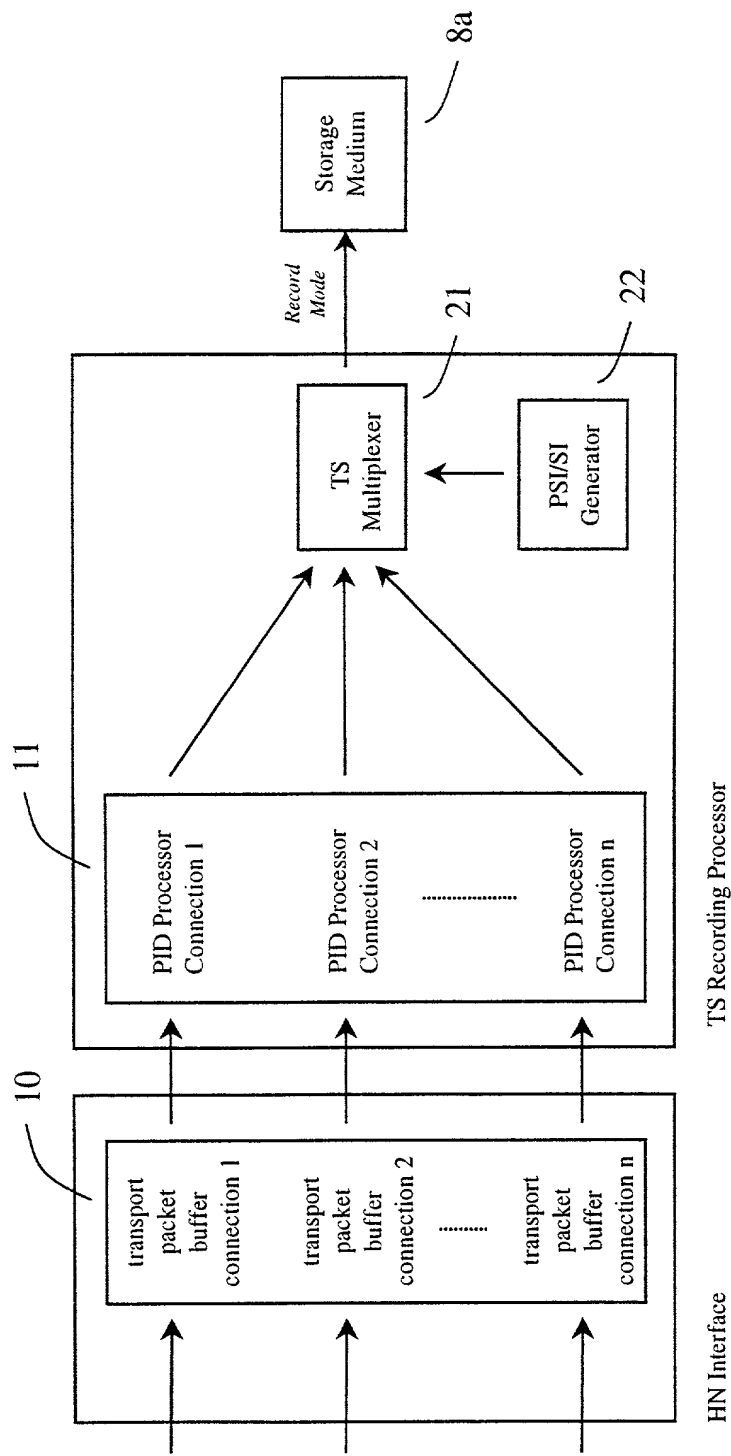
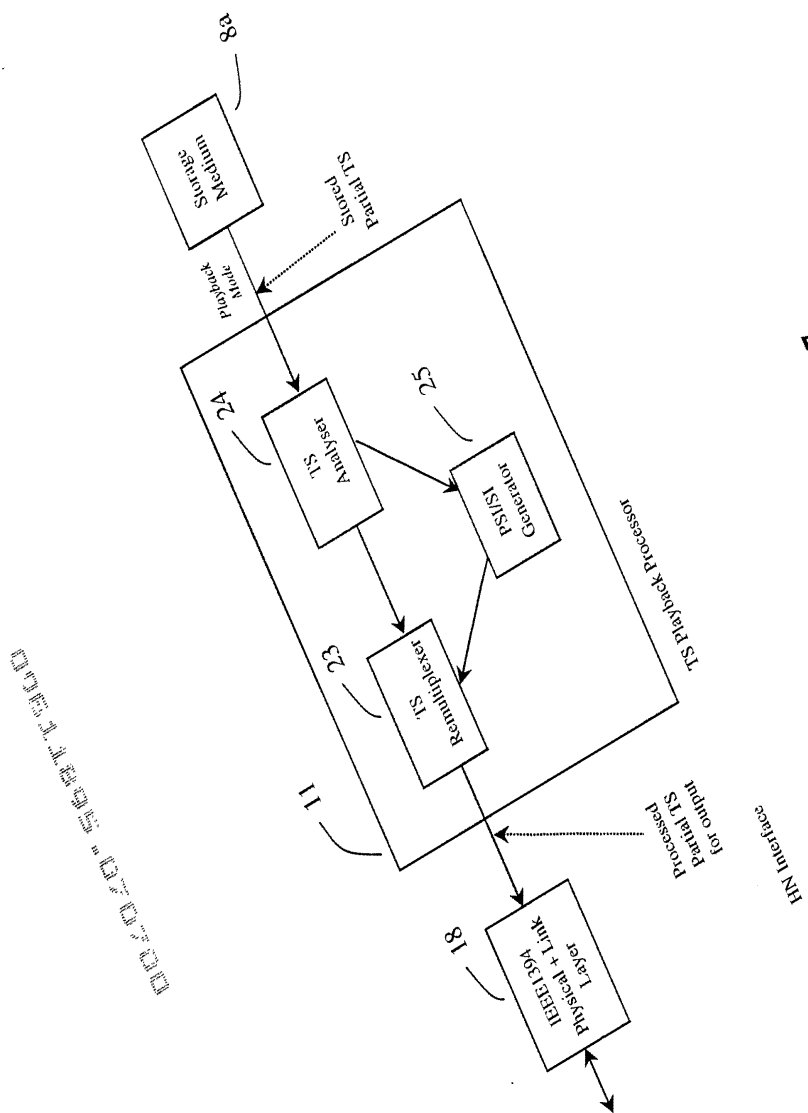


Fig. 6



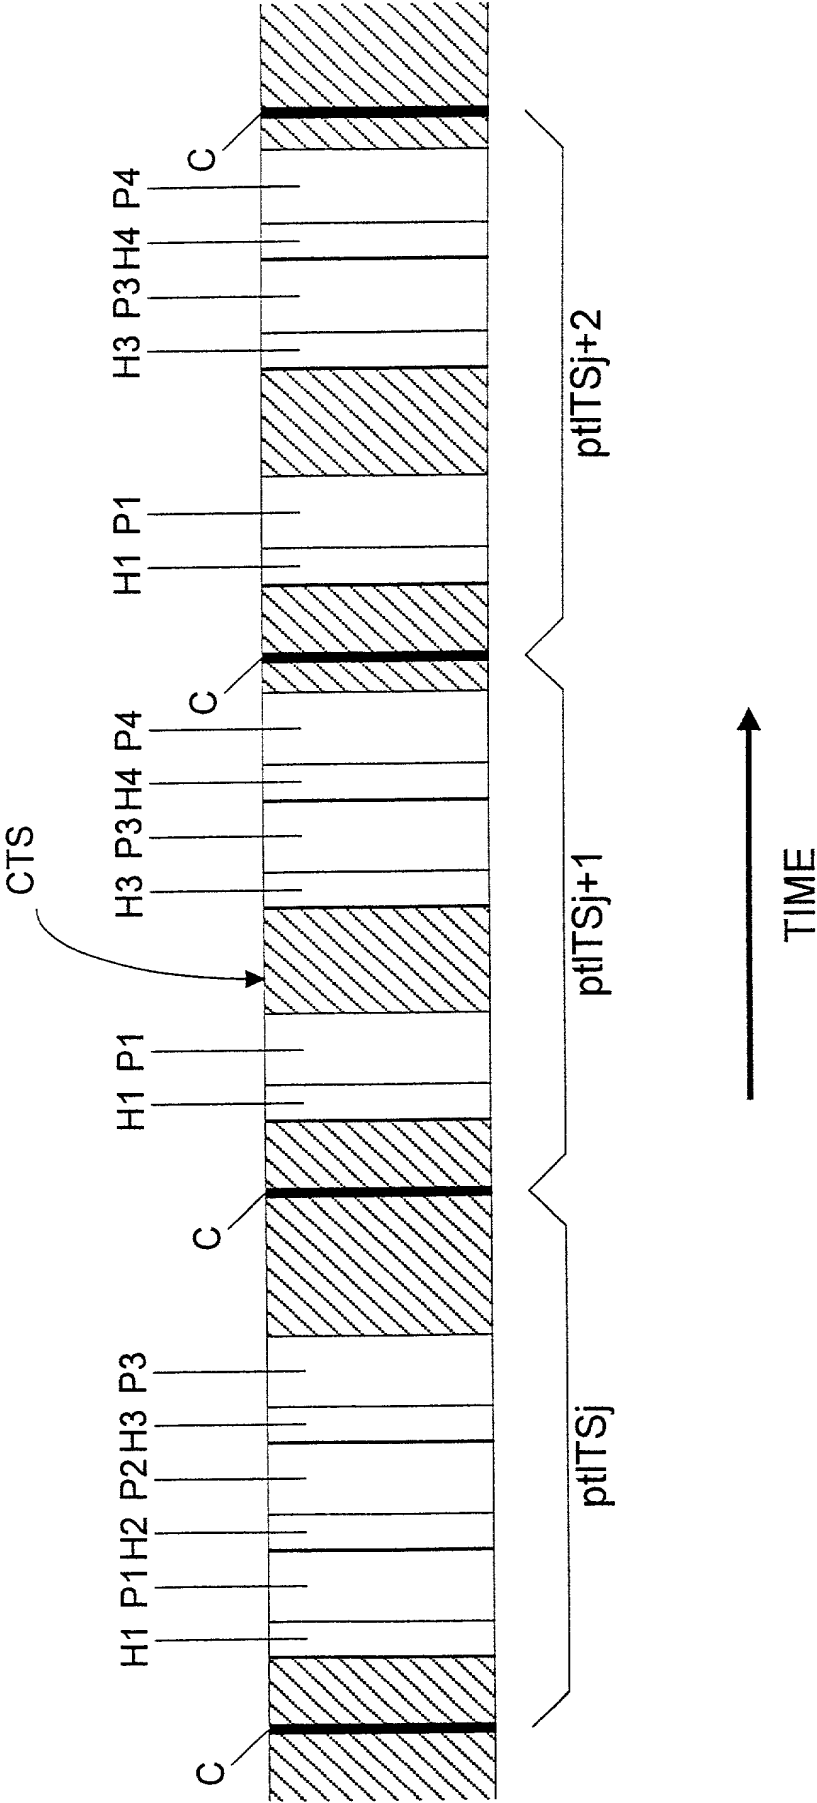


Fig. 8

FROMMER LAWRENCE & HAUG LLP

Page 1 of 1